



Completed by
H-BAU Technik (s.-no.)



ORDER FORM

KUNEX® welded construction with corner joint tape

BK03

Rev. 01: 2017-08-25

Client:	Project:
Com.:	Element:

Joint tape requirements

DIN 18541 and DIN 18541-2
work standard (abP)

bitumen-compatible (BV)
non bitumen-compatible (NB)

Joint tape Designation

Expansion joint tape DA240/20 DA240/35
+ Corner joint tape DA120/120EA

Expansion joint tape DA320/20 DA320/25 DA320/35
+ Corner joint tape DA165/165EA

■ L1 = _____ mm


End specification: *end stop*
 cover
 none

■ L2 = _____ mm


■ L3 = _____ mm

End specification: *end stop*
 cover
 none

End stop
(Sample illustration)



Cover
(Sample illustration)



manufacturing tolerances according to
DIN 16941 and DIN 18020 table 1:

Length ≤ 3000mm = ± 15mm
Length 3000mm – 6000mm = ± 20mm
Length > 6000mm = ± 30mm

Note:

By external influences, e.g. temperature and storage conditions,
dimensional deviations of up to 3% are possible.

Number

_____ pieces

Please select joint tape design on page 2





ORDER FORM


Completed by
H-BAU Technik (s.-no.)




KUNEX® welded construction with corner joint tape

BK03

Joint tape selection:

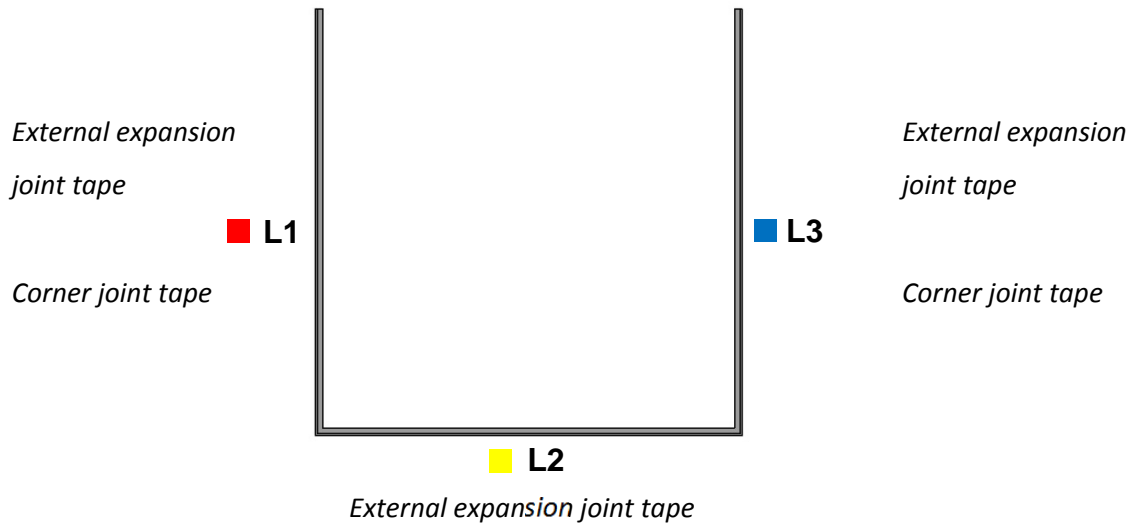

Configuration:

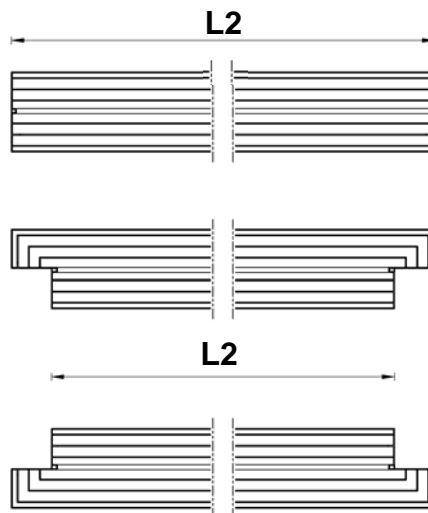

Released by : _____ date: _____

